

Strikelt2

Panic Device Power Controller



Altronix Strikelt2 operates one (1) 24VDC panic hardware device. It is designed to handle the high current surge panic hardware locking devices demand. In addition, an auxiliary power output provides power for accessory devices such as card readers, keypads, REX PIRs, electronic timers, relays, etc.



Strikelt2

Specifications

Input

Voltage	115VAC, 60Hz, 7A
	One (1) NO trigger input
Fusing	Input fuse rating: 6.3A

Outputs

Power options:

- One (1) 23.2-24VDC lock output rated up to 16A for 300ms, 0.5A continuous hold current
- One (1) 23.2-24VDC filtered regulated auxiliary output rated at 0.5A continuous supply current

*Note: Total combined current for the outputs may not exceed 1A

Battery Charging

Capacity	4AH/12VDC (2 within enclosure) Larger batteries require separate enclosure
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
	Batteries are sold separately
	When 4AH batteries are used, battery capacity for emergency stand-by is 30 minutes

Indicators (LED)

AC Power (Green)	Input voltage is present
DC Output (Red)	24VDC is on

Agency Listings

UL	UL294 (Access Control System Units)
cUL	CSA Standard C22.2 No.205-M1983, Signal Equipment
CSFM	California State Fire Marshal Approved

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)
Shipping:	13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Weights (approx.):

Product:	4.85 lb. (2.2 kg)
Shipping:	5.45 lb. (2.47 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%


BTU/Hr. (approx.): 14 BTU/Hr.

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

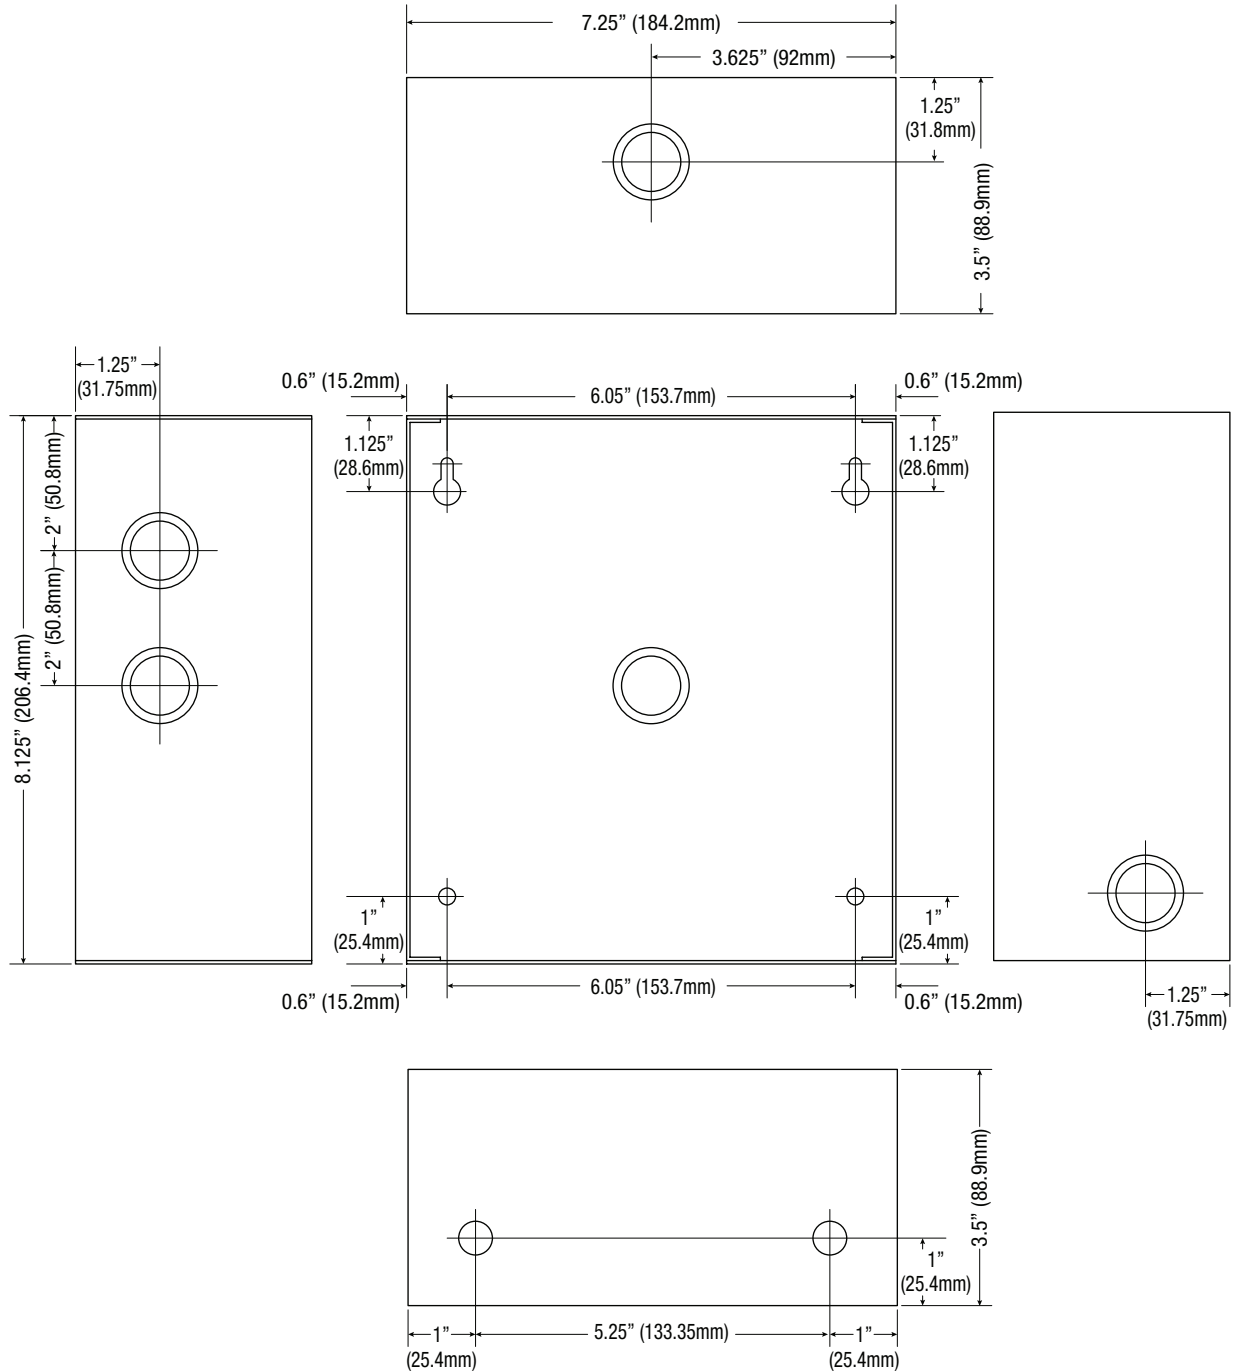

Lifetime Warranty